

LED Floodlight– BR1 150W






Applications

- Buildings, old and new
- Monuments, Stadiums
- Plaza, Gyms
- Ports / Dock Areas
- Searchlights
- Golf Courses
- Plant hire, Ferries
- Special projects



General Information

- IP66
- Meanwell driver
- Philips SMD 3030 LEDs
- CRI>80Ra
- 5-year warranty
- Adjustable module
- 304/316 screws
- Clear or diffused lens
- Salt water resistant
- IK10 high vandal protection
- Ideal for CCTV scenarios

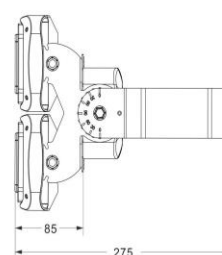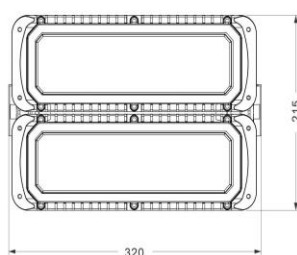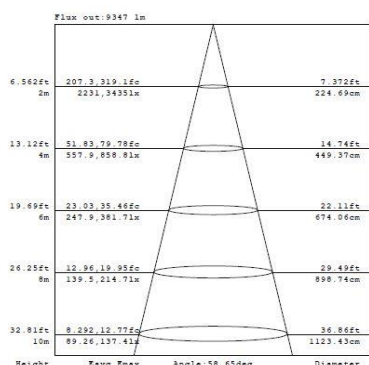

The lens is anti UV and available with either a clear or diffused finish



We use 304/316 stainless steel screws to prevent corrosion

Each modular can be adjusted separately

We have higher wattages available in this range too. The full list is:-

75W, 150W, 230W, 300W, 450W, 600W, 900W and 1200W

Technical information	JLHM-150W-BR1
LED Type	Philips SMD3030 LEDs
LED Voltage / Hz	AC220-240V 50-60Hz (AC90-305V PSU available but made to order)
LED Wattage	150W
Viewing angle	25°/60°/90°/110° and 130x80°
Working temperature	-20°C to 50°C
Lumens per watt	120 lm/w
CCT (K) – Daylight white (DW) & Lumens	5000-6000K and 18400lm
CCT (K) – Natural white (NW) & Lumens	4000-4500K and 18400lm
CCT (K) – Warm white (WW) & Lumens	2700-3200K and 18000lm
60° Lux values at 2M, 4M, 6M, 8M, 10M	2231lux/557lux/248lux/140lux/89lux
CRI and Power factor	Ra>80 and 0.9 PF rating
Average rated life	30,000 hours
Nett weight and Product Dimensions	NW 4.6KG and W320 x L275 x H215mm
Pack quantity unit/box	Unit 2/ Pack 2pc
Carton Dimensions & Gross Weight	48x35x35 cm and 12KG GW
Energy rating	Class A+
Warranty	5 Years
Dimmable	Optional with Dali, 1-10V, PWM