


input selector



1	2	Mode
OFF	OFF	DALI
ON	OFF	Push
OFF	ON	0..10V
ON	ON	1..10V

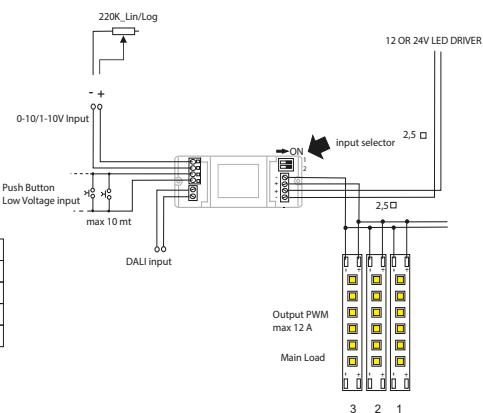

JLEDS is an official Distributor for the QLT DALI & PUSH/1-10V Dimmable Interface DALI1102B.

🇬🇧 DALI/0-10V/1-10V interface and low voltage push

- Dimming control by DALI, PUSH, 0-10V, 1-10V signal or potentiometer, selecting the dipswitch combination on board.
- Input 12V ÷ 24V/DC
- For resistive loads up to 12A
- PWM 300Hz output

🇮🇹 Interfaccia DALI/0-10V/1-10V e ingresso Pulsante a bassa tensione

- Comando DALI, pulsante, 0-10V, 1-10V o potenziometro, selezionabile tramite impostazione dip-switches.
- Alimentazione 12V ÷ 24V/DC
- Comanda carichi resistivi fino a 12A
- Uscita PWM 300Hz

🇩🇪 DALI/0-10V/1-10V Interface und NV-Tastersteuerung

- Dimmbar durch DALI, Taster, 0-10V, 1-10V Signal oder Poti durch Einstellung der Dip-Switches.
- Eingang: 12V ÷ 24V/DC
- Für ohmsche Lasten bis 12A
- Ausgang PWM 300Hz

🇫🇷 Interface DALI/0-10V/1-10V et bouton-poussoir à basse tension

- Régulateur de luminosité avec commande DALI, bouton-poussoir, 0-10V, 1-10V ou poti, à sélectionner par dip-switches
- Alimentation 12V ÷ 24V/DC
- Alimentation de charges résistives jusqu'à 12A
- Sortie PWM 300Hz

🇪🇸 Regulador DALI/0-10V/1-10V y pulsador de baja tensión

- Regulador con protocolo DALI, pulsador, 0-10V, 1-10V o poti, para seleccionar con dip-switches
- Entrada 12V ÷ 24V/DC
- Para cargas resistivas hasta 12A
- Salida PWM 300Hz

Part number	INPUT		I Max	OUTPUT		Watt	Dimensions A x B x C
	Min	Max		V Max			
A40DALI1102B	12	24	12A	Vin -0,5V		144 / 288W	138 x 40 x 28,5

