


LED Designer Floodlight– BR1 75W






Applications

- Buildings, old and new
- Monuments, Stadiums
- Plaza, Gyms
- Ports / Dock Areas
- Searchlights
- Golf Courses
- Plant hire, Ferries
- Special projects

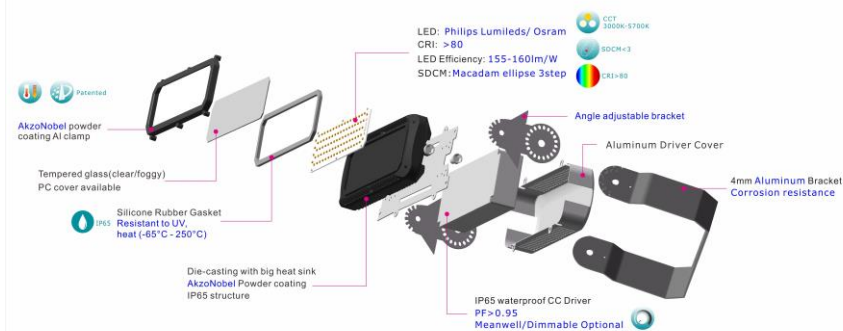

General Information

- IP66
- Meanwell driver
- Philips SMD 3030 leds
- CRI>80Ra
- 5-year warranty
- Adjustable module
- 304/316 screws
- Clear or diffused lens
- Salt water resistant

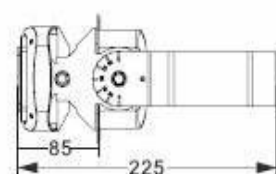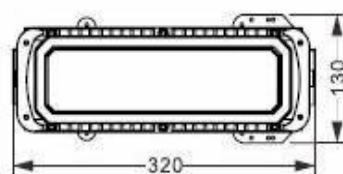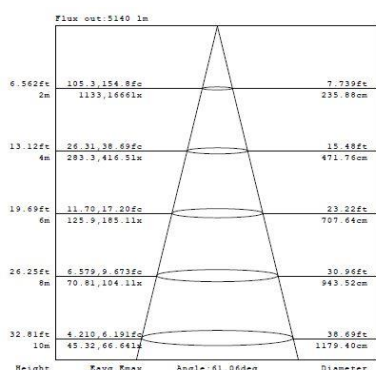

The lens is anti UV and available with either a clear or diffused finish



We use 304/316 stainless steel screws to prevent corrosion

We have higher wattages available in this range too. The full list is:-

75W, 150W, 230W, 300W, 450W, 600W, 900W and 1200W

Technical information	JLHM-75W-BR1
LED Type	Philips SMD3030 LEDs
LED Voltage / Hz	AC220-240V 50-60Hz (AC90-305V PSU available but made to order)
LED Wattage	75W
Viewing angle	25°/60°/90°/110° and 130x80°
Working temperature	-20°C to 50°C
Lumens per watt	120 lm/w
CCT (K) – Daylight white (DW) & Lumens	5000-6000K and 9000lm
CCT (K) – Natural white (NW) & Lumens	4000-4500K and 9000lm
CCT (K) – Warm white (WW) & Lumens	2700-3200K and 8700lm
60° Lux values at 2M, 4M, 6M, 8M, 10M	1133lux/283lux/126lux/71lux/45lux
CRI and Power factor	Ra>80 and 0.9 PF rating
Average rated life	30,000 hours
Product Dimensions	W320 x L225 x H130mm
Pack quantity unit/box	Unit 1/ Pack 1pc
Carton Dimensions & Nett/Gross Weight	34x29x20 cm and 3.0 Kgs / 3.20 Kgs
Energy rating	Class A+
Warranty	5 Years
Dimmable	Optional with Dali, 1-10V, PWM