



Specializing in LED Lighting Solutions



LED Fixtures - Mini Light Series

CATALOGUE

Tel: 01473 719132

email: sales@jleds.co.uk

www.jleds.co.uk

11mm or 16mm Miniature LED Light with 60° lens

Flush mount. Attach using the nut/bolt or by folding back the spring clip.

SIZE : 11mm / 16mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W and 3W

HOUSING MATERIAL: Aluminium / Stainless Steel

HOUSING COLOURS: Black/Silver/White (+ Custom colours)

IP RATING : IP67

BEAM ANGLE : 60 Degree

DIMENSIONS 11MM MODEL : Ø15mm X H25mm

DIMENSIONS 16MM MODEL : Ø20mm X H28mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber / UV

With Lens



11mm or 16mm Miniature LED Light with 180° no lens

Flush mount. Attach using the nut/bolt or by folding back the spring clip.

SIZE : 11mm / 16mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W and 3W

HOUSING MATERIAL: Aluminium / Stainless Steel

HOUSING COLOURS: Black/Silver/White (+ Custom colours)

IP RATING : IP67

BEAM ANGLE : 180 Degree

DIMENSIONS 11MM MODEL : Ø15mm X H25mm

DIMENSIONS 16MM MODEL : Ø20mm X H28mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber / UV



8mm Side View Miniature LED Light

Flush mount. Attach using the nut/bolt or by folding back the spring clip.

SIZE : 8mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W

HOUSING MATERIAL: Aluminium

HOUSING COLOURS: Black/Silver/White

IP RATING : IP67

BEAM ANGLE : 180 Degree

DIMENSIONS : Ø11mm X H26mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber



11mm Side View Miniature LED Light

Flush mount. Attach using the nut/bolt or by folding back the spring clip.

SIZE : 11mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W

HOUSING MATERIAL: Aluminium

HOUSING COLOURS: Black/Silver/White

IP RATING : IP67

BEAM ANGLE : 180 Degree

DIMENSIONS : Ø15mm X H33mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber





JLED S
LED LIGHTING

11mm or 16mm Miniature LED Lights and 8mm or 11mm Side View LED Indicator

INSTALLATION GUIDE

Attach using the nut/bolt or by folding back the spring clip.

Screw Thread
11mm and 16mm

**Screw nut upwards
along thread until tight**



Snap Fit
11mm and 16mm

Bend back clips

OR



LED Indicator Light

Flush mount. Attach using the nut/bolt.

SIZE : 11mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W

HOUSING MATERIAL: Aluminium

HOUSING COLOURS: Black/Silver

IP RATING : IP20

BEAM ANGLE : 25 Degree

DIMENSIONS : Ø11mm X H28mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber



LED Module - Round Version

SIZE : 32mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W

HOUSING MATERIAL: Plastic

HOUSING COLOURS: Black/Chrome

IP RATING : IP67

BEAM ANGLE : 120 Degree

DIMENSIONS : L32mm x W23mm x H8mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber / Pink / UV



LED Module - Straight Version

SIZE : 160mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W

HOUSING MATERIAL: Plastic

HOUSING COLOURS: Black/Chrome

IP RATING : IP67

BEAM ANGLE : 120 Degree

DIMENSIONS : L60mm x W11mm x H5mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber / Pink / UV



IP67 LED Surface Mount Fixture - Spot lens

SIZE : ø40mm

OPERATING VOLTAGE: 12V-24V AC/DC

WATTAGE : 1W and 3W

HOUSING MATERIAL: Aluminium

HOUSING COLOURS: Black/Silver

IP RATING : IP67

BEAM ANGLE : 25 Degree

DIMENSIONS : ø40mm x H27mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber / UV



IP67 LED Surface Mount Fixture - Flood lens

SIZE : ø40mm

OPERATING VOLTAGE: 12V-24V AC/DC

WATTAGE : 1W and 3W

HOUSING MATERIAL: Aluminium

HOUSING COLOURS: Black/Silver

IP RATING : IP67

BEAM ANGLE : 120 Degree

DIMENSIONS : ø40mm x H20mm

CABLE LENGTH : 1M

CCT : WW 3000K / NW 4000K / DW 6500K / CW 9000K

COLOUR : Red / Green / Blue / Amber / UV



IP68 Marine LED Navigation Lights

Visibility Two Nautical Miles

SIZE : ø47mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W

HOUSING MATERIAL: Aluminium

HOUSING COLOURS: Black/Silver

IP RATING : IP68

BEAM ANGLE : 110 Degree

DIMENSIONS : L47mm x W30mm x H19mm

CABLE LENGTH : 1M

COLOUR : Red or Green



IP68 Marine LED Navigation Lights

Visibility Two Nautical Miles

SIZE : ø47mm

OPERATING VOLTAGE: 12VDC

WATTAGE : 1W

HOUSING MATERIAL: Aluminium

HOUSING COLOURS: Black/Silver

IP RATING : IP68

BEAM ANGLE : 110 Degree

DIMENSIONS : L47mm x W30mm x H19mm

CABLE LENGTH : 1M

COLOUR : White



Fade In And Out Dimmer

OPERATING VOLTAGE: 12V-24DC

IP RATING: IP65

DIMENSIONS: L45mm x W23mm x H5mm

CABLE LENGTH: 180mm on both sides

WIRE GAUGE: 20 AWG



Switchback LED Driver

INPUT VOLTAGE: 12VDC


OUTPUT: 1A

IP RATING: IP67

DIMENSIONS: L45mm x W23mm x H12mm

CABLE LENGTH: 280mm on both sides

WIRE GAUGE: 22 AWG

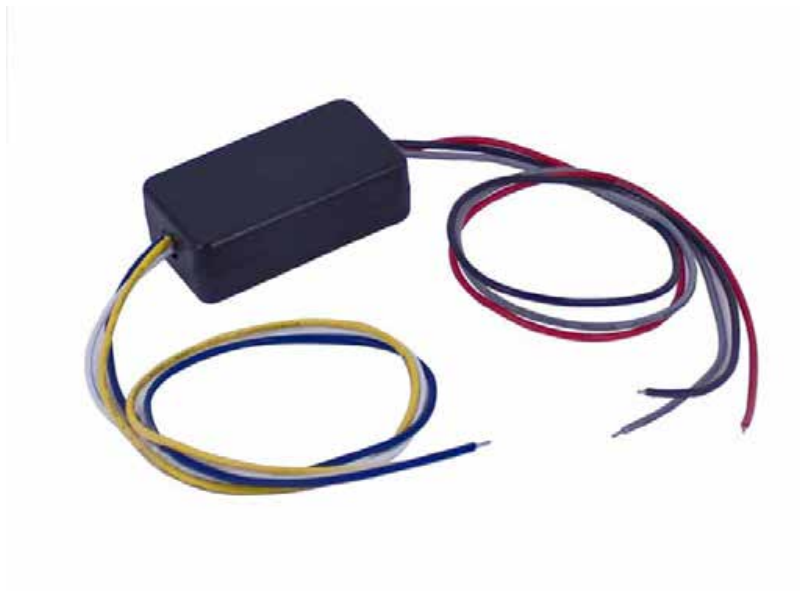

PROJECT ONE



CEILING LIGHT



UNITED KINGDOM

PROJECT ONE



INDOOR/OUTDOOR ARCHITECTURAL USE




FLUSH MOUNTED LEDS

PROJECT TWO



HANDRAIL LIGHTING SYSTEM

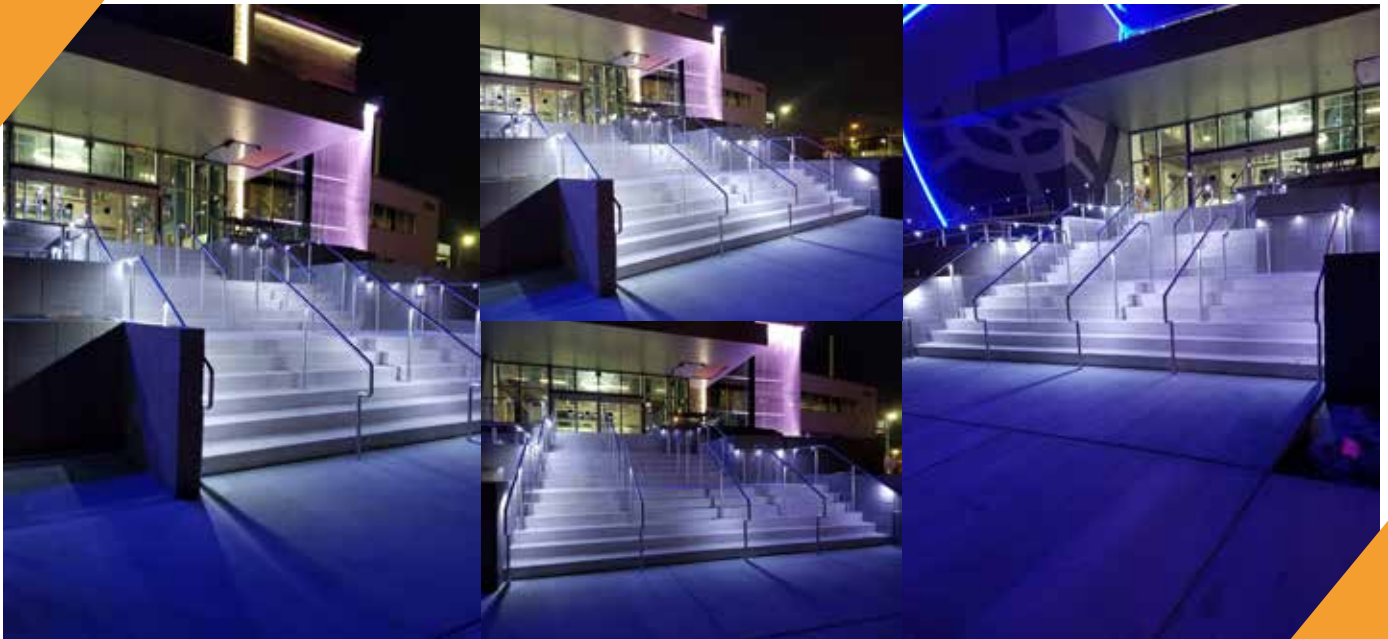

USA

PROJECT THREE

SNOWMOBILE SAFETY LED SYSTEM



USA



JLEDs
LED LIGHTING

Specializing in LED Lighting Solutions

Email: sales@jleds.co.uk

Tel: 01473 719132

**JLEDs Ltd
27 Digby Road
Ipswich, Suffolk, IP4 3NB. UK.**

Company Registered in England: Co. number 09911297

www.jleds.co.uk

CATALOGUE

Featuring LED Fixtures - Mini Light Series