

Mini LED Down Light



Mini



Feature





- Special design for Mini LED down light
- Various types for options
- Use Epistar branded chip to guarantee the long life span
- Complete kit with Constant Current (300mA) non-dimmable LED driver
- 3 years warranty
- IP20 (Although MRF55-3W can be modified to make it IP44)







Mini LED Down Light - Non Dimmable



MINI ROUND VERSION

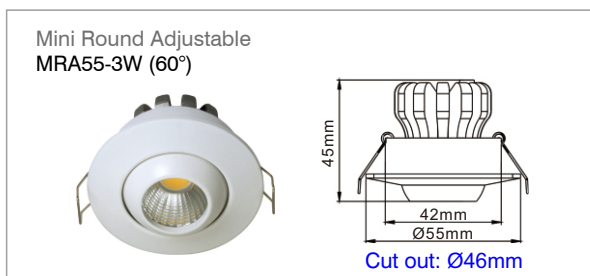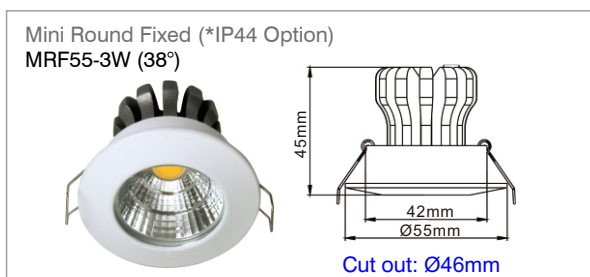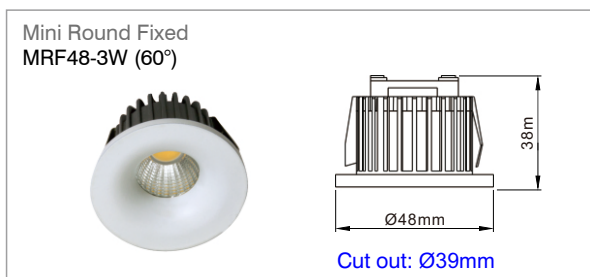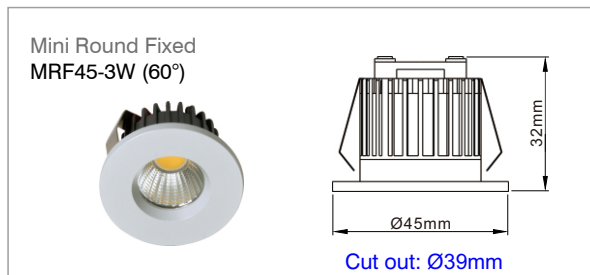

MINI SQUARE VERSION

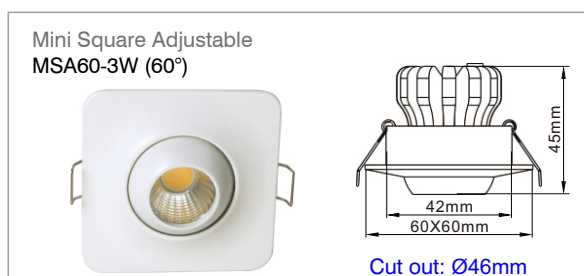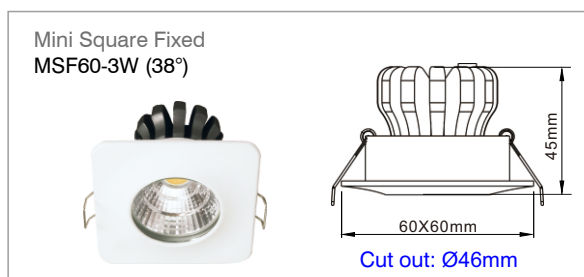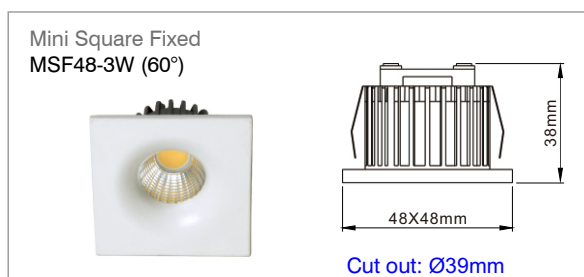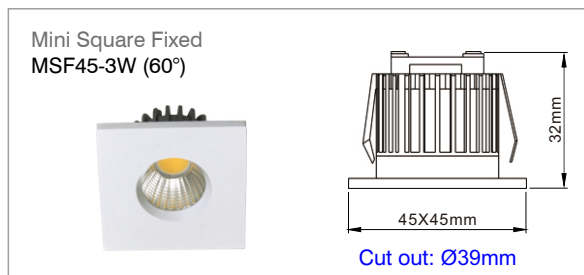

STANDARD MODEL Ra 80

Product Code	Lumens	Beam	Wattage	Efficiency	Adjustable	Dimensions	Cut Out	CCT	CRI	LED Brand
Mini Round										
MRF45-3W - 827/30/40/50	260lm	60°	3W	86lm/W	No	ø45 x H32mm	ø39mm	2700/3000K/4000K/5000K	80	Epistar
MRF48-3W - 827/30/40/50	260lm	60°	3W	86lm/W	No	ø48 x H38mm	ø39mm	2700/3000K/4000K/5000K	80	Epistar
MRF55-3W - 827/30/40/50	260lm	38°	3W	86lm/W	No	ø55 x H45mm	ø46mm	2700/3000K/4000K/5000K	80	Epistar
MRA55-3W - 827/30/40/50	260lm	60°	3W	86lm/W	Yes	ø55 x H45mm	ø46mm	2700/3000K/4000K/5000K	80	Epistar
Mini Square										
MSF45-3W - 827/30/40/50	260lm	60°	3W	86lm/W	No	L45 x W45 x H32mm	ø39mm	2700/3000K/4000K/5000K	80	Epistar
MSF48-3W - 827/30/40/50	260lm	60°	3W	86lm/W	No	L48 x W48 x H38mm	ø39mm	2700/3000K/4000K/5000K	80	Epistar
MSF60-3W - 827/30/40/50	260lm	38°	3W	86lm/W	No	L60 x W60 x H45mm	ø46mm	2700/3000K/4000K/5000K	80	Epistar
MSA60-3W - 827/30/40/50	260lm	60°	3W	86lm/W	Yes	L60 x W60 x H45mm	ø46mm	2700/3000K/4000K/5000K	80	Epistar

IP20 (* Although MRF55-3W can be modified to make it IP44)

Life time: 30,000 hours (70% Lumen maintenance) Input

Voltage: 100-240VAC 50-60Hz

Output Voltage: 8-18V DC

Constant Current 300mA

3 Years Warranty