



JLEDS is an official Distributor for these QLT LED Dimmable drivers , PDCV types.

| Part Number  | Output V | Output@230V<br>I Max | W<br>@230V | Output@110V<br>I max | W<br>@110V | Dimensions<br>A x B x C | Protocol    |
|--------------|----------|----------------------|------------|----------------------|------------|-------------------------|-------------|
| A40PDCVD000B | 24V/DC   | 0,58A                | 13W        | 0,41A                | 10W        | 138 x 40 x 28,5         | DALI / PUSH |
| A40PDCVD120B | 12V/DC   | 1,08A                | 13W        | 0,83A                | 10W        | 138 x 40 x 28,5         | DALI / PUSH |
| A40PDCV1000B | 24V/DC   | 0,58A                | 13W        | 0,41A                | 10W        | 138 x 40 x 28,5         | 1-10V       |

PUSH

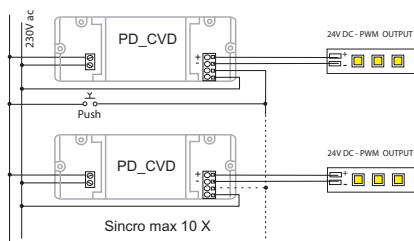

DALI / 1\_10V

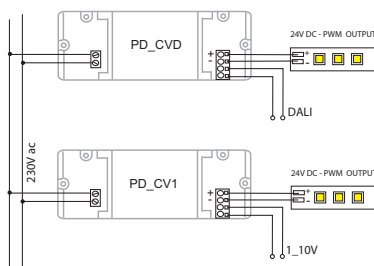

Datasheet download

### Alimentatore LED dimmerabile DALI & Push - 1-10V

- Alimentatore indipendente - IP20 - Classe II di isolamento
- A40PDCVD000B: DALI o Pulsante sul lato primario - 12 o 24VDC PWM
- A40PDCV1000B: 1-10V - 24VDC PWM
- Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario.
- Alimentazione: 110V ÷ 240V/AC - Uscita stabilizzata

### Dimmable LED Driver DALI & Push - 1-10V

- Driver for independent mounting - IP20 - Insulation class II
- A40PDCVD000B: DALI or Push-Button on the primary side - 12 o 24VDC PWM
- A40PDCV1000B: 1-10V - 24VDC PWM
- Self-resetting protection against overtemperatures, open circuit and against output short circuits
- Input voltage: 110V ÷ 240V/AC - Steady output