

LED IP68 GROUND LIGHT

GL1, GL3, GL6 & GL9





LED Ground Light


Feature

- IP68
- Robust water proof construction
- Patented design using special glue plus rubber ring technology
- 8mm thickness glass passes IK10 rating test
- Able to bear 2 tons weight (2000KG)
- 316L stainless steel guarantee no corrosion
- 12-24V DC driver inside base
- Input voltage 220-240VAC
- We use CREE LED with 40° beam angle
- Available in colours 3000K, 4000K, 6000K




IP68 LED Ground Light


GL1

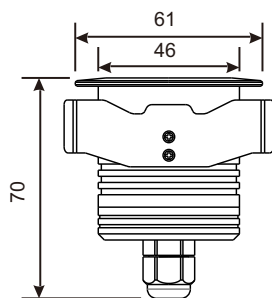

GL3 + GL6



GL9

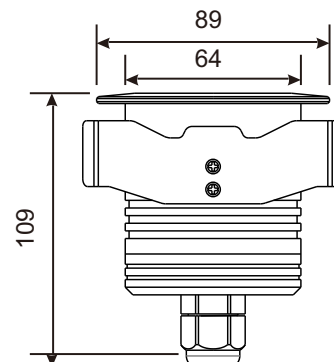

STANDARD MODEL

Life time: 50,000 hours (70% Lumen maintenance)
3 Years warranty



Product Code	Input Voltage	Watts	Lumens	Beam	Dimensions	IK rating
GL1-1.5W	220-240VAC	1.5W	200 lm	40°	ø61x70mm	IK10
GL3-5W	220-240VAC	5W	450 lm	40°	ø89x84mm	IK10
GL6-7W	220-240VAC	6-7W	550 lm	40°	ø89x84mm	IK10
GL9-9W	220-240VAC	9W	700 lm	40°	ø89x109mm	IK10
GL1-1.5W-RGB	220-240VAC	1.5W		40°	ø61x70mm	IK10
GL3-5W-RGB	220-240VAC	5W		40°	ø89x84mm	IK10
GL6-7W-RGB	220-240VAC	6-7W		40°	ø89x84mm	IK10
GL9-9W-RGB	220-240VAC	9W		40°	ø89x109mm	IK10

▪ Available in colours 3000K, 4000K, 6000K

RGB Option

