


Specification Sheet

COB RGBW LED FLEXI STRIP

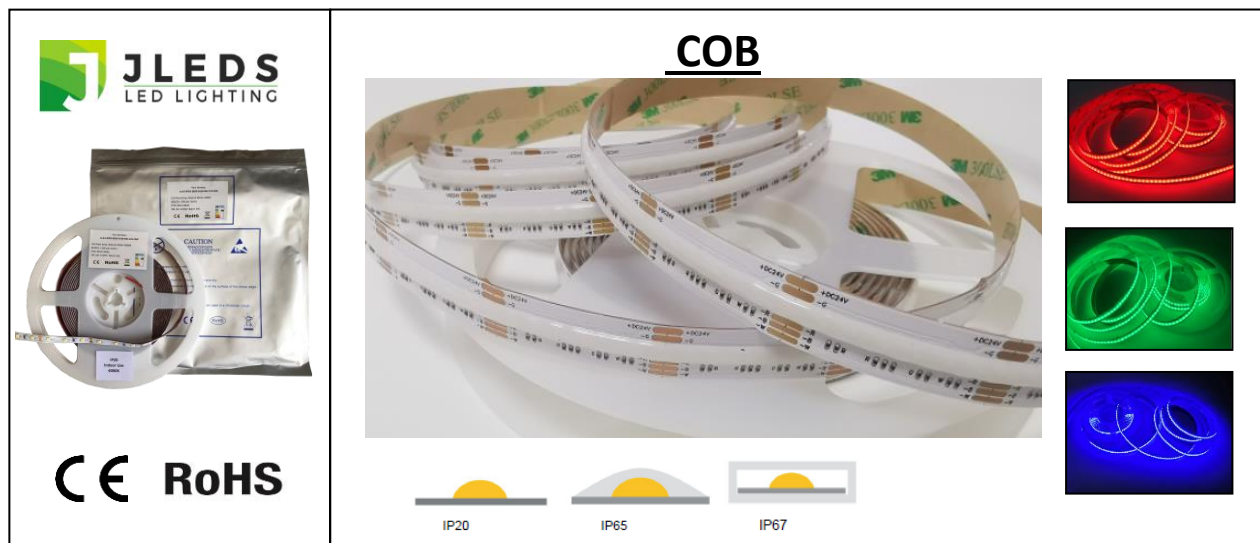

Technical information	JL-A1-IP20-COB11-12-896-20W-24V-RGBW
Description	Superb choice to provide a non-spotting effect, giving a high performance and an excellent colour rendition.
Grade	Grade "A" LED flexi strip with superb colour consistency
Roll Length	5M roll
IP Rating	IP20, IP65, and IP67
LED Quantity/ Wattage / Per Metre	24V SMD 896pcs / 20W per metre
Lumens	RGBW, Red 90lm (4W), Green 340lm (4W), Blue 60lm (4W) & White 240lm (4W)
LED Voltage	24VDC
Cut Point	24V 31.25mm
Width of strip	IP20 12mm, IP67 = 14mm
Colour RGB Strip	Red 620-630nm, Green 520-530nm, Blue 460-470nm, White 3000K or 6000K
View Angle	180°
Work Temperature	-25°C to +45°C
CRI	Ra90
PCB Thickness and Colour	Double layer PCB, / White PCB
Wire attached	20AWG 5-wire
Adhesive type	3M 300LSE
Warranty	3 Years
	It is wise to ensure the strip is fitted into a profile, so the heat is dissipated through the metal. Strip width is 12mm, so check which profiles will be most suitable for it.

JLEDS Ltd

27 Digby Road, Ipswich, Suffolk, IP4 3NB. UK

Tel: +44 (0) 1473 719132 or Mobile +44 (0) 7715 635041 Email: jeff@jleds.co.uk Website: www.jleds.co.uk